

## Standard Preparation 700 mm Sink with 1 Bowl

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**132803 (LG716PN)**Sink unit with 1 bowl  
500x500x300mm, 700mm

### Short Form Specification

**Item No.** \_\_\_\_\_

Made from 304 AISI stainless steel. The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, is sound-deadened and has an overflow rim and welded corners. Integral rear upstand, h=100mm, with 8mm radius. All-round apron. Square section legs 40x40mm on 1" height-adjustable feet (+/-20mm)

Bowl mm500x500x300h with overflow pipe and 2" drain hole.

### Construction


- 50 mm worktop in 304 AISI stainless steel, 10/10 in thickness with overflow rim along the top.
- Square section legs and 40 mm height-adjustable feet in 304 AISI stainless steel.
- Sink tops easily slotted onto the legs and taps are easily installed from the rear.
- Delivered in knock-down package.
- Wide range of taps are available to suit every need.
- 100 mm upstand with 10 mm radiused corner and 13 mm deep, designed to be used against a wall.

### Optional Accessories


- Set of 4 wheels (2 with brake) PNC 855150   
d. 100mm for tables and sinks  
(total height on wheels= 993 mm)
- Elbow operated mixer tap with PNC 855322   
spout, 3/4" single hole
- Elbow operated mixer tap short PNC 855323   
spout, 3/4" single hole
- Foot operated Mixer tap with PNC 855328   
spout & with hot&cold pedals,  
3/4"
- Single plastic drain syphon 2 PNC 895313   
" for sinks

**APPROVAL:** \_\_\_\_\_

**Front**

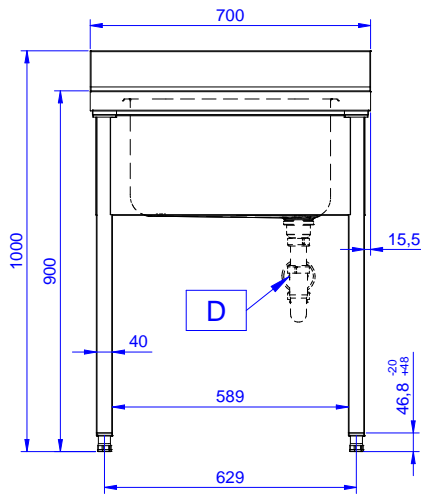


**Side**

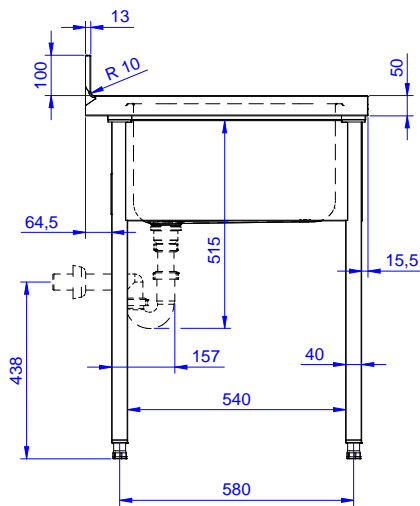

**D** = Drain

**Top**

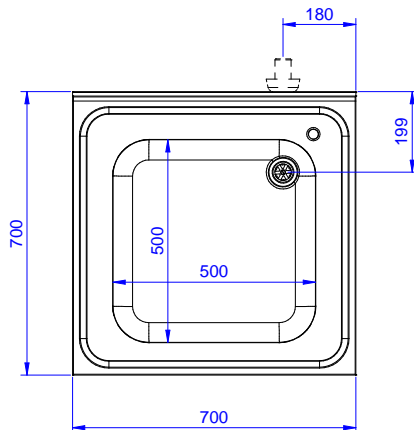

**Key Information:**

**External dimensions, Width:**

**132803 (LG716PN)** 700 mm

**External dimensions, Depth:**

700 mm

**External dimensions, Height:**

1000 mm

**Upstand Dimensions, Height:**

100 mm

**Upstand Dimensions, Depth:**

13 mm

**Upstand Dimensions, Radius:**

R=10

**Bowls number**

1

**Bowl dimensions**

500x500xH300

**Worktop thickness:**

50 mm

**Net weight:**

ISO 9001; ISO 14001 kg