

Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter



Short Form Specification

Item No.

High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- Deep drawn V-Shaped well.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control panel offers a better guarantee against oil infiltration. (only for 392337)
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- The special design of the control knob system guarantees against water infiltration. (only for 392384)
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit is 900mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.

Sustainability

• This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

APPROVAL:





Included Accessories

Included Accessories		
• 1 of Door for open base cupboard (only for 392384)	PNC 206342	
• 1 of DOOR FOR OPEN BASE CUPBOARD (only for 392337)	PNC 206350	
 1 of 2 half size baskets for 18/23lt well fryers 	PNC 927223	
Optional Accessories		
• Stainless steel oil filter for 23 litres fryer to remove particles of grease and food residuals) - EV0900	PNC 200086	
 Lid for oil container for 23 l fryers (only for 392384) 	PNC 200171	
 Junction sealing kit 	PNC 206086	
 4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install with base supports for feet/wheels. (only for 392337) 	PNC 206135	
• Flanged feet kit	PNC 206136	
 Frontal kicking strip for concrete installation, 400 mm (only for 392384) 	PNC 206147	
 Frontal kicking strip for concrete installation, 800 mm (only for 392384) 	PNC 206148	
 Frontal kicking strip for concrete installation, 1000 mm (only for 392384) 	PNC 206150	
 Frontal kicking strip for concrete installation, 1200 mm (only for 392384) 	PNC 206151	
 Frontal kicking strip for concrete installation, 1600 mm (only for 392384) 	PNC 206152	
 Side handrail for right/left hand (only for 392384) 	PNC 206165	
• Frontal handrail 400 mm (only for 392384)	PNC 206166	
• Frontal handrail 800 mm (only for 392384)	PNC 206167	
Pair of side kicking strips	PNC 206180	
 2 panels for service duct (single installation) (only for 392384) 	PNC 206181	
• Large handrail (portioning shelf) 400 mm (only for 392384)	PNC 206185	
 Large handrail (portioning shelf) 800 mm (only for 392384) 	PNC 206186	
 Frontal handrail 1200 mm (only for 392384) 	PNC 206191	
 Frontal handrail 1600 mm (only for 392384) 	PNC 206192	
 Hygienic lid for 23lt fryers 	PNC 206201	
 2 panels for service duct (back to back installation) (only for 392384) 	PNC 206202	
 Frontal kicking strip for 23lt fryers in two parts 	PNC 206203	
 Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers 	PNC 206209	
• 4 feet for concrete installation (not for 900 line freestanding grill) (only for 392384)	PNC 206210	
Chimney upstand, 400 mm	PNC 206303	
 2 side covering panels, height 700 mm, depth 900 mm (only for 392384) 	PNC 206335	
Door for open base cupboard (only for 202384)	PNC 206342	

Door for open base cupboard (only for PNC 206342 392384)

Modular Cooking Range Line EV0900 One Well Electric Fryer 23 liter


• Base support for feet/wheels (lateral) for 23lt fryers and pastacookers and refrigerated bases (900)	PNC 206372	
 Rear paneling - 600mm (EV0700/900) (only for 392384) 	PNC 206373	
 Rear paneling - 800mm (EV0700/900) (only for 392384) 	PNC 206374	
 Rear paneling - 1000mm (EV0700/900) (only for 392384) 	PNC 206375	
 Rear paneling - 1200mm (EV0700/900) (only for 392384) 	PNC 206376	
 Chimney grid net, 400mm 	PNC 206400	
 Sediment collection tray for 23 litres fryer (to be put in the well) - EV0900 	PNC 921023	
 2 half size baskets for 18/23lt well fryers 	PNC 927223	
 1 full size basket for 18/23lt well fryers 	PNC 927226	
 Unclogging rod for 23lt fryers drainage pipe 	PNC 927227	
• Deflector for floured products for the 23lt fryer	PNC 960645	



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Modular Cooking Range Line EV0900 One Well Electric **Fryer 23 liter**

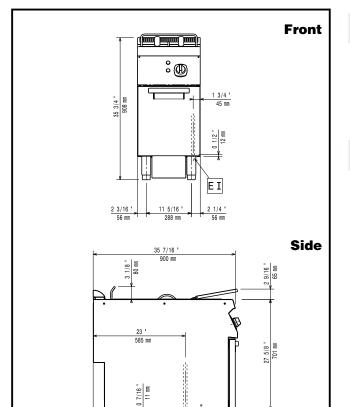

ΕI

26 9/16 674 mm

15 3/4 " 400 mm

4 15/16 ' 126 mm

EI = Electrical inlet (power)

36 " 915 mm

27 3/8 " 695 mm

EQ = Equipotential screw

ΕQ

14 1/8 358

Electric

Supply voltage:		
392337 (Z9KKGDBAMCA)	380-400 V/3N ph/50/60 Hz	
392384 (Z9KKGOBAMCA)	415-430 V/3N ph/50/60 Hz	
Total Watts:		
392337 (Z9KKGDBAMCA)	18 kW	
392384 (Z9KKGOBAMCA)	17.2 kW	
Key Information:		
Usable well dimensions (width):	340 mm	
Usable well dimensions (height):	575 mm	
Usable well dimensions (depth):	400 mm	
Well capacity:	21 It MIN; 23 It MAX	
Performance*:		
392337 (Z9KKGDBAMCA)	37.5 kg∖hr	
392384 (Z9KKGOBAMCA)	35.4 kg∖hr	
Thermostat Range:	105 °C MIN; 185 °C MAX	
Net weight:	57 kg	
Shipping weight:		
392337 (Z9KKGDBAMCA)	73 kg	
392384 (Z9KKGOBAMCA)	70 kg	
Shipping height:	1080 mm	
Shipping width:	460 mm	
Shipping depth:	1020 mm	
Shipping volume:	0.51 m ³	
If appliance is get up or pout to or of	nainat tamanaratura aanaltura	

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

*Based on:	
Certification	group:

5 7/8 " 150 mm

Тор

3 15/16 "

100

ASTM F1361-Deep fat fryers EFE91M23



Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.