

### Modular Cooking Range Line EVO900 Two Wells Electric Fryer 18 liter



## **Short Form Specification**

#### <u>Item No.</u>

High efficiency tilting incoloy armoured heating elements (33kW) placed inside the wells. Deep drawn wells. Oil drains through a tap into a container positioned under the wells. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Righ-angled side edges eliminate gaps and possible dirt traps between units.

| ITEM #       |  |  |
|--------------|--|--|
| MODEL #      |  |  |
| NAME #       |  |  |
| <u>SIS #</u> |  |  |
| AIA #        |  |  |

### **Main Features**

- Interior of wells with seamlessly laser-welded corners for ease of cleaning.
- Swivelling incoloy armoured heating elements located inside the well can be lifted up for easier cleaning.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 4 half size baskets and 1 right and left side doors for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL:





## Modular Cooking Range Line EVO900 Two Wells Electric Fryer 18 liter

# **Included Accessories**

- 2 of Door for open base cupboard PNC 206342
- 2 of 2 half size baskets for 18/23lt well PNC 927223 fryers

# **Optional Accessories**

| Optional Accessories   |  |   |
|--|--|---|
| <ul> <li>Junction sealing kit</li> </ul>   | PNC 206086   |   |
| • 4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install   | PNC 206135   |   |
| with base supports for feet/wheels.  |  |   |
| <ul> <li>Flanged feet kit</li> </ul>   | PNC 206136   |   |
| <ul> <li>Frontal kicking strip for concrete<br/>installation, 800 mm</li> </ul>  | PNC 206148   |   |
| <ul> <li>Frontal kicking strip for concrete<br/>installation, 1000 mm</li> </ul>   | PNC 206150   |   |
| <ul> <li>Frontal kicking strip for concrete<br/>installation, 1200 mm</li> </ul>   | PNC 206151   |   |
| <ul> <li>Frontal kicking strip for concrete<br/>installation, 1600 mm</li> </ul>   | PNC 206152   |   |
| <ul> <li>Pair of side kicking strips for concrete<br/>installation</li> </ul>  | PNC 206157   |   |
| <ul> <li>Side handrail for right/left hand</li> </ul>  | PNC 206165   |   |
| • Frontal handrail 800 mm  | PNC 206167   |   |
| <ul> <li>Frontal kicking strip, 800 mm</li> </ul>  | PNC 206176   |   |
| • Frontal kicking strip, 1000 mm   | PNC 206177   |   |
| Frontal kicking strip, 1200 mm   | PNC 206178   |   |
| • Frontal kicking strip, 1600 mm   | PNC 206179   |   |
| Pair of side kicking strips  | PNC 206180   |   |
| <ul> <li>2 panels for service duct (single installation)</li> </ul>  | PNC 206181   |   |
| IIIStallation)   |  |   |
| <ul> <li>Large handrail (portioning shelf) 800<br/>mm</li> </ul>   | PNC 206186   |   |
| • Large handrail (portioning shelf) 800  | PNC 206186<br>PNC 206191   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> </ul>   |  | - |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> </ul>   | PNC 206191   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back</li> </ul>  | PNC 206191<br>PNC 206192   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for</li> </ul>   | PNC 206191<br>PNC 206192<br>PNC 206202   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> </ul>  | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm,</li> </ul>   | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm, depth 900 mm</li> </ul>  | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304<br>PNC 206335<br>PNC 206342   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm, depth 900 mm</li> <li>Door for open base cupboard</li> <li>Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers</li> </ul>   | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304<br>PNC 206335<br>PNC 206342   |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm, depth 900 mm</li> <li>Door for open base cupboard</li> <li>Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump)</li> <li>Base support for feet or wheels -</li> </ul>   | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304<br>PNC 206335<br>PNC 206342<br>PNC 206359                             |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm, depth 900 mm</li> <li>Door for open base cupboard</li> <li>Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump)</li> <li>Base support for feet or wheels - 800mm (EV0700/900)</li> <li>Base support for feet or wheels -</li> </ul>   | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304<br>PNC 206335<br>PNC 206342<br>PNC 206342<br>PNC 206359               |   |
| <ul> <li>Large handrail (portioning shelf) 800 mm</li> <li>Frontal handrail 1200 mm</li> <li>Frontal handrail 1600 mm</li> <li>2 panels for service duct (back to back installation)</li> <li>4 feet for concrete installation (not for 900 line freestanding grill)</li> <li>Chimney upstand, 800 mm</li> <li>2 side covering panels, height 700 mm, depth 900 mm</li> <li>Door for open base cupboard</li> <li>Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump)</li> <li>Base support for feet or wheels - 800mm (EV0700/900)</li> <li>Base support for feet or wheels - 1200mm (EV0700/EV0900)</li> <li>Base support for feet or wheels -</li> </ul> | PNC 206191<br>PNC 206192<br>PNC 206202<br>PNC 206210<br>PNC 206304<br>PNC 206335<br>PNC 206342<br>PNC 206359<br>PNC 206367<br>PNC 206368 |   |



- Rear paneling 1000mm (EV0700/900) PNC 206375
- Rear paneling 1200mm (EV0700/900) PNC 206376
- 2 half baskets for 18lt fryers with front PNC 927200 hook
- 1 full basket for 18lt fryers with front hook PNC 927201
- 2 half size baskets for 18/23lt well fryers PNC 927223
- 1 full size basket for 18/23lt well fryers PNC 927226

Modular Cooking Range Line EVO900 Two Wells Electric Fryer 18 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



35 3/4 " 908 mm ° (D)

 $\begin{bmatrix} 0 & 0 \end{bmatrix}$ 

°®

\_ ا 1 3/4 " 45 mm

ና

## Modular Cooking Range Line EV0900 Two Wells Electric Fryer 18 liter

## Electric

Front

Supply voltage: 392095 (Z9FREH2HF0) 392179 (Z9FREH2HFN) Total Watts: Predisposed for:

380-400 V/3N ph/50/60 Hz 230 V/3 ph/50/60 Hz 33 kW

380-400V 3N~ 50/60Hz 30-33kW

392095 (Z9FREH2HF0)

### **Key Information:**


| ,                                |                        |
|----------------------------------|------------------------|
| Usable well dimensions (width):  | 340 mm                 |
| Usable well dimensions (height): | 290 mm                 |
| Usable well dimensions (depth):  | 400 mm                 |
| Well capacity:                   | 18 It MIN; 20 It MAX   |
| Thermostat Range:                | 105 °C MIN; 185 °C MAX |
| Net weight:                      | 115 kg                 |
| Shipping weight:                 |                        |
| 392095 (Z9FREH2HF0)              | 102 kg                 |
| 392179 (Z9FREH2HFN)              | 130 kg                 |
| Shipping height:                 |                        |
| 392095 (Z9FREH2HF0)              | 1080 mm                |
| 392179 (Z9FREH2HFN)              | 1120 mm                |
| Shipping width:                  | 1020 mm                |
| Shipping depth:                  |                        |
| 392095 (Z9FREH2HF0)              | 880 mm                 |
| 392179 (Z9FREH2HFN)              | 860 mm                 |
| Shipping volume:                 |                        |
| 392095 (Z9FREH2HF0)              | 0.97 m³                |
| 392179 (Z9FREH2HFN)              | 0.98 m <sup>3</sup>    |
| Certification group:             |                        |
| 392095 (Z9FREH2HF0)              | EFI9218                |
| 392179 (Z9FREH2HFN)              | N9FE3                  |
|                                  |                        |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line EVO900 Two Wells Electric Fryer 18 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

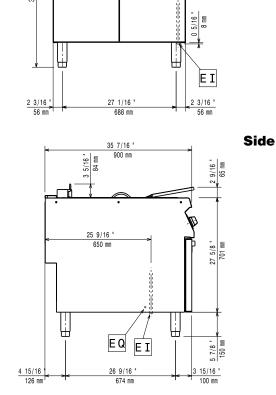

- EI = Electrical inlet (power)
- **EQ** = Equipotential screw

